

# Panasonic Wireless Home Safety



# **Why Panasonic IP Cameras?**

# Surveillance Market Brand Placement

E  
N  
T  
E  
R  
P  
R  
I  
S  
E



S  
M  
A  
L  
L  
&  
M  
I  
D



# **Why Panasonic IP Cameras?**

- **Brings in reliability Brand Trust/Brand Power.**
- **Product Tested and Approved @ Japan.**
- **Heal the Pain.**
- **Make in India.**
- **Customized Product Design @ competitive pricing.**
- **Ensure to cater small & mid segment effectively.**
- **Service reliability.**

# Product Line-Up

# Network Video Recorder

- 8 Channel Network Video Recorder (Model: PI-HRA081A)
- Support upto 4K video real-time.
- H.265+/H.265/H.264 Stream Encryption Supported
- Wi-Fi Function Support Possible.
- Smart Playback Supported.
- Supports mobile & PC application for remote monitoring, playback, backup & configuration.
- Single Ethernet Port with NIC Type 10M/100M Self adaptive
- Support 1 SATA for HDD support upto 10TB
- Simultaneous Video Output on HDMI/VGA
- Support Smart Analysis with Detection for Human, Intrusion, Line Crossing, Motion, Video Blind, IP Conflict etc.
- ONVIF Compliant (Supports Profile S & T)
- Throughput is 80 mbps.



# IP Dome Camera

- Resolution - 3MP (Model: PI-DNA3PWA)
- Plastic Body.
- H.265+/H.265/H.264 Stream Encryption Supported.
- Both PoE and Wi-Fi enabled.
- 1/2.7" Progressive CMOS Sensor with 3.6 mm lens.
- IR Distance supported is 30m.
- Angle of View 92° (Diagonal).
- Dual Stream Supported (Main & Sub) with Built in Mic.
- Supports Privacy Masking, WDR, BLC, Manual Exposure, Day/Night Mode etc.
- Support Smart Analysis with Detection for Human, Intrusion, Line Crossing, Motion, Video Blind, IP Conflict etc.
- ONVIF Compliant (Supports Profile S & T)
- Support multiple communication protocols like HTTP, HTTPS, RTSP, DDNS, P2P etc.
- Supports mobile & PC application for remote monitoring, playback, backup & configuration.



# IP Dome Camera

- Resolution - 5MP (Model: PI-DUA5MWA)
- Metal Body with IP66 and IK10.
- H.265+/H.265/H.264 Stream Encryption Supported.
- Both PoE and Wi-Fi enabled.
- 1/2.9" Progressive CMOS Sensor with 3.6 mm lens.
- IR Distance supported is 20m.
- Angle of View 92° (Diagonal).
- Dual Stream Supported (Main & Sub) with Built in Mic.
- Supports Privacy Masking, WDR, BLC, Manual Exposure, Day/Night Mode etc.
- Support Smart Analysis with Detection for Human, Intrusion, Line Crossing, Motion, Video Blind, IP Conflict etc.
- ONVIF Compliant (Supports Profile S & T)
- Support multiple communication protocols like HTTP, HTTPS, RTSP, DDNS, P2P etc.
- Supports mobile & PC application for remote monitoring, playback, backup & configuration.





# IP Bullet Camera

- Resolution - 3MP (Model: PI-BUA3MWA)
- Metal Body with IP66.
- H.265+/H.265/H.264 Stream Encryption Supported.
- Both PoE and Wi-Fi enabled.
- 1/2.7" Progressive CMOS Sensor with 3.6 mm lens.
- IR Distance supported is 30m.
- Dual LED with Hybrid Smart Operation for Color Image in low light.
- Angle of View 92° (Diagonal).
- Dual Stream Supported (Main & Sub) with Built in Mic.
- Supports Privacy Masking, WDR, BLC, Manual Exposure, Day/Night Mode etc.
- Support Smart Analysis with Detection for Human, Intrusion, Line Crossing, Motion, Video Blind, IP Conflict etc.
- ONVIF Compliant (Supports Profile S & T)
- Support multiple communication protocols like HTTP, HTTPS, RTSP, DDNS, P2P etc.
- Supports mobile & PC application for remote monitoring, playback, backup & configuration.



# IP Bullet Camera

- Resolution - 5MP (Model: PI-BUA5MWA)
- Metal Body with IP66.
- H.265+/H.265/H.264 Stream Encryption Supported.
- Both PoE and Wi-Fi enabled.
- 1/2.9" Progressive CMOS Sensor with 3.6 mm lens.
- IR Distance supported is 30m.
- Dual LED with Hybrid Smart Operation for Color Image in low light.
- Angle of View 92° (Diagonal).
- Dual Stream Supported (Main & Sub) with Built in Mic.
- Supports Privacy Masking, WDR, BLC, Manual Exposure, Day/Night Mode etc.
- Support Smart Analysis with Detection for Human, Intrusion, Line Crossing, Motion, Video Blind, IP Conflict etc.
- ONVIF Compliant (Supports Profile S & T)
- Support multiple communication protocols like HTTP, HTTPS, RTSP, DDNS, P2P etc.
- Supports mobile & PC application for remote monitoring, playback, backup & configuration.




# Wi-Fi Pan Tilt (PT) Camera

- Resolution - 2MP (Model: PI-PNA2PWA)
- Plastic Body.
- H.264 Stream Encryption Supported.
- Wi-Fi enabled.
- 1/2.9" Progressive CMOS Sensor with 3.6 mm lens.
- IR Distance supported is 10m.
- Color 0.01 Lux @F1.2; Black-n-White 0.001Lux@F1.2.
- Viewing Angle 100°.
- PT Angle Tilt: -10°~75°; Pan: 0°~355°.
- Event and Continuous Recording Supported.
- Supports 2-Way Audio with Built-In Mic and Speaker.
- Support Human Detection.
- Supports SD card upto 512 GB.
- Supports up to 6 Presets with Home Preset Selection Option.
- Supports mobile & PC application for remote monitoring, playback, backup & configuration.



# System Architecture

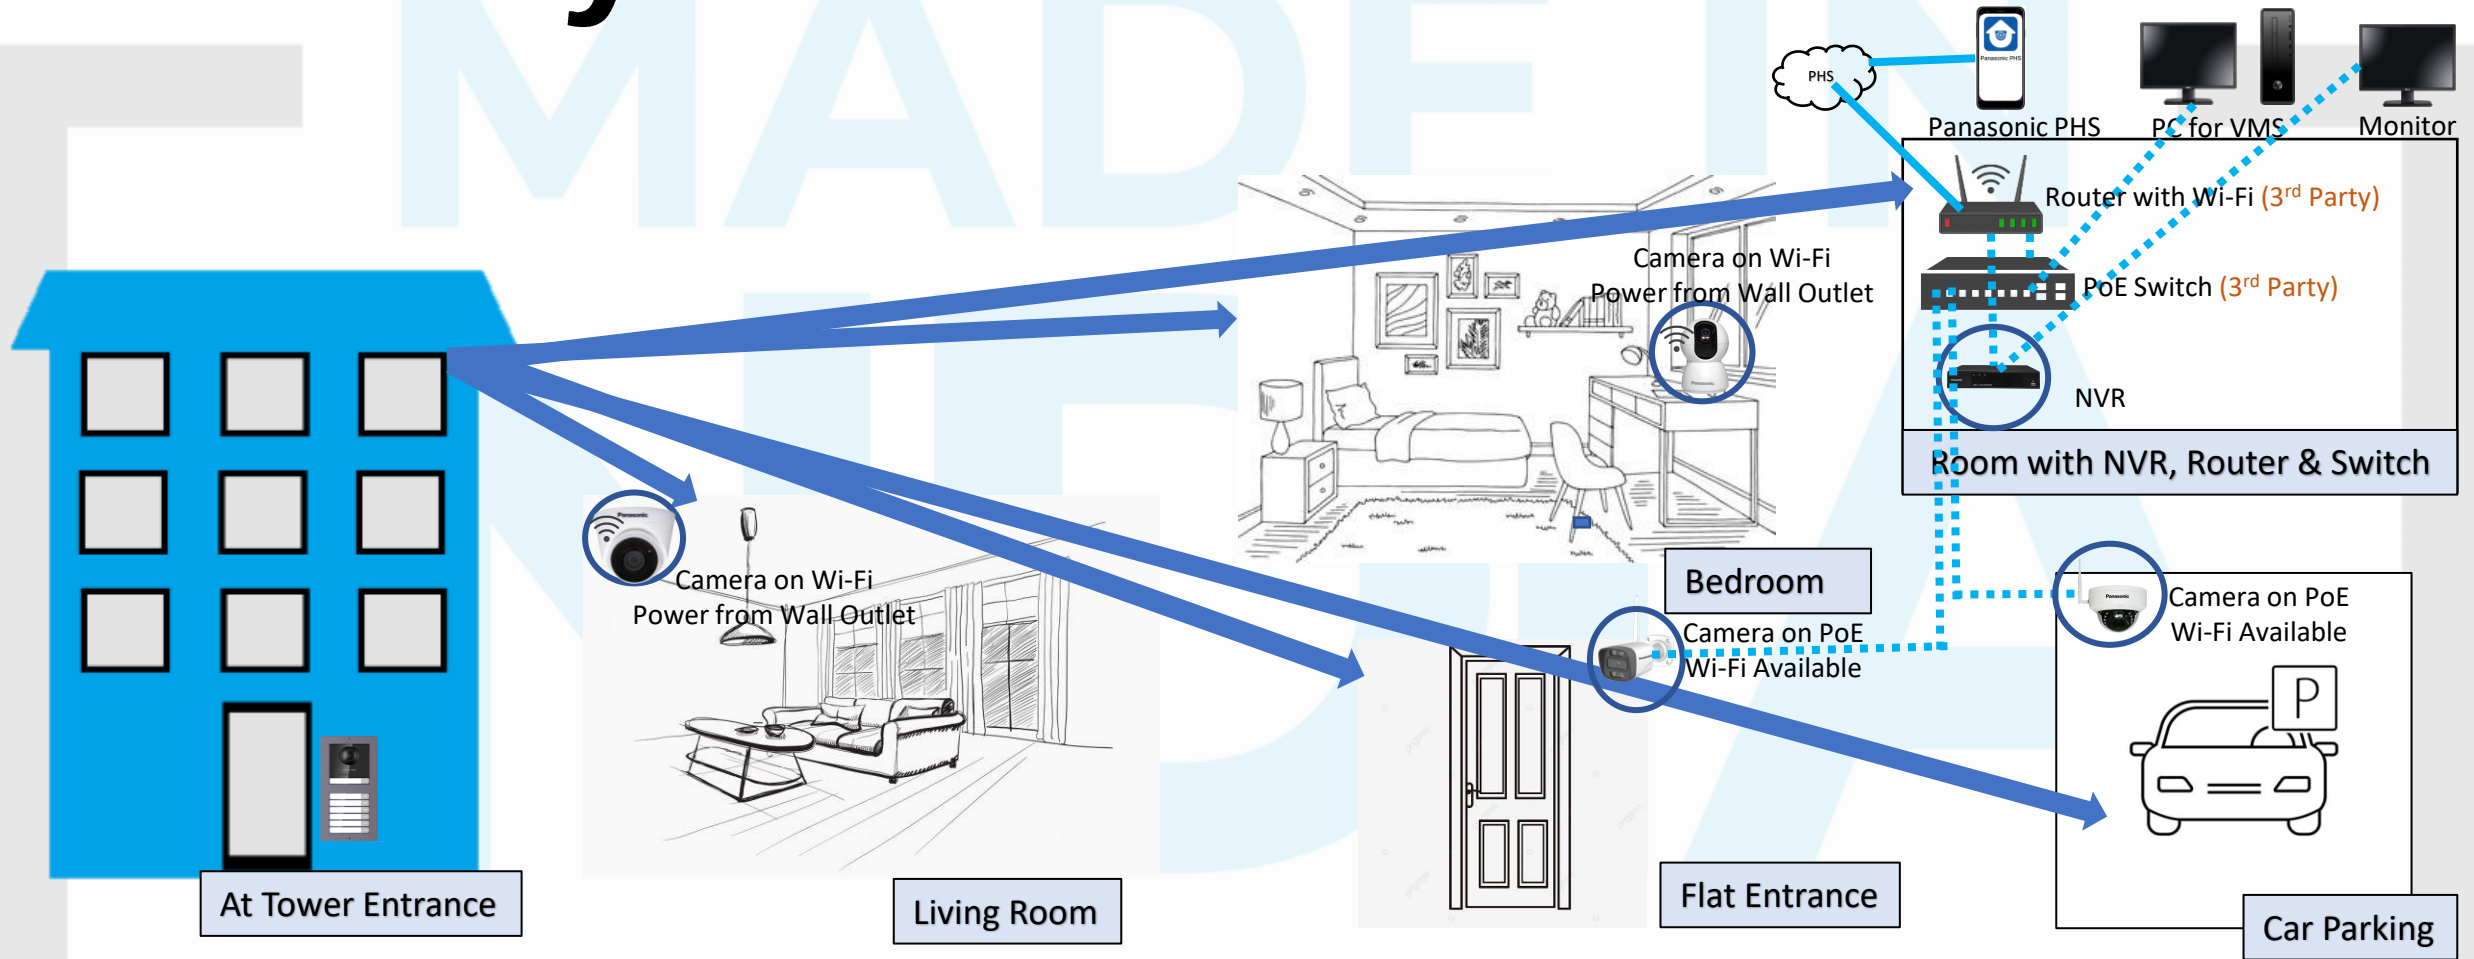

MADE IN

INDIA

**THANK YOU**